

CRMX Outdoor specifications

www.lumenradio.com/outdoor

	CRMX Outdoor Flex	CRMX Outdoor Receiver
Model code (Order code)	ON-RFX1 (800-4101)	ON-RRX1 (800-4001)
Supported protocols		
USITT DMX-512 (1986 & 1990) and DMX512-A	Yes	Yes
Art-Net I, II & 3, ETCNet 2 & 3, Strand ShowNet, Streaming ACN, Pathport, KINet V1 & V2	Yes, input any protocol and output any protocol	No
RDM ANSI E1.20	Yes	Yes
Firmware upgrade	Ethernet	TIA/EIA-485
DALI (converted from DMX)	Yes, broadcast/16 groups/64 short addresses	Yes, broadcast/16 groups/64 short addresses
Works with CRMX SuperNova RDM controller	Yes	Yes

DMX interface		
Number of universes supported	1	1
Full DMX fidelity and frame integrity	Yes ¹	Yes
Error correction and packet recovery	Yes	Yes
Frame synchronization	Less than 0.01 ms	Less than 0.01 ms
End-to-end DMX latency	Less than 5 ms ²	Less than 5 ms
Auto sensing of DMX frame rate and frame size	Yes	Yes
Supported DMX frame rates	1 – 830 Hz ² / 0.8 – 7352 Hz	1 – 830 Hz ²
Number of DMX channels supported	0 – 512	0 – 512
Loss of DMX input behavior	DMX driver output will go into high impedance state in receiving and repeating mode. Timeout after 1.25s in transmitting mode	DMX driver output will go into high impedance state
W-DMX™ G2/G3/G4 Compatibility ⁴	Yes, in receive mode	Yes

Power		
High voltage input	100-240VAC / 47-70Hz / 0.12A / 10W	100-240VAC / 47-70Hz / 0.12A / 10W
Transient protected power input	Yes	Yes

RF characteristics		
Modes of operation	Transmitter, Receiver and Repeater	Receiver
Automated Cognitive Coexistence	Yes	Yes
Dynamic adaptive frequency hopping	Yes	Yes
Recoverable Radio Packet Error Rate	30%	30%
Operational frequency range	2402-2480 MHz	2402-2480 MHz
RF output in high power mode	300 mW (25 dBm) ⁵	300 mW (25 dBm) ⁵
RF output in normal power mode	100 mW (20 dBm)	100 mW (20 dBm)
RF output in low power mode	35 mW (15 dBm) or 10 mW (10 dBm)	35 mW (15 dBm) or 10 mW (10 dBm)
RF modulation	GFSK	GFSK
Sensitivity at 0.1% Packet Error Rate	-96 dBm	-96 dBm
Tested link range (High power mode using standard antennas in free line-of-sight)	Up to 1000 m	Up to 1000 m
Recovery time upon loss of radio link	Less than 1 s	Less than 1 s

Approvals		
FCC: 15.247&68 Class B; Canada ICES 003 CE; EN 301 489-1; EN 301 489-3; EN 300 328; SS-EN 61547:2009; EN 60 950; SRRC - China; ARIB STD-T66 - Japan	Yes	Yes

Environment		
Operating temperature range (ambient)	-20° C to +50° C -4° F to 122° F	-20° C to +50° C -4° F to 122° F
Humidity	Ingression protection, submerged down to 1 m	Ingression protection, submerged down to 1 m

Physical		
Enclosure	IP67 Vandal proof housing	IP67 Vandal proof housing
Dimensions (W x H x D) excluding antenna	201 x 244 x 78 mm 7.9" x 9.6" x 3"	201 x 244 x 78 mm 7.9" x 9.6" x 3"
Weight	1.6 kg, 3.5 lbs	1.6 kg, 3.5 lbs

Connectors		
Antenna connector	N female	N female
DMX connector	Pluggable terminal strip, Phoenix® MSTB 2.5	Pluggable terminal strip, Phoenix® MSTB 2.5
DALI connector	Pluggable terminal strip, Phoenix® MSTB 2.5	Pluggable terminal strip, Phoenix® MSTB 2.5
AC input	13AWG Pluggable terminal strip	13AWG Pluggable terminal strip
Supplied accessories	2 dBi N antenna	2 dBi N antenna




¹ Not in repeater mode

² Latency increased with repeater

³ Limited by the DMX512-A standard

⁴ Compatible with W-DMX™ transmitters on the 2.4 GHz band

⁵ Allowed in North America only

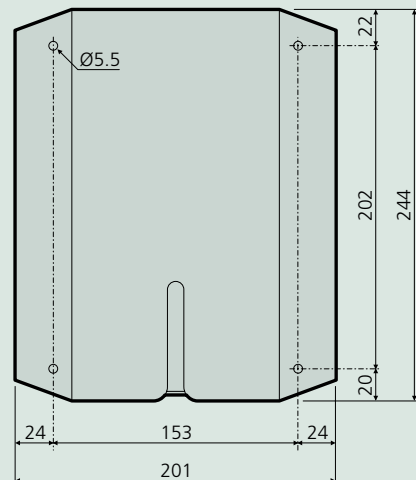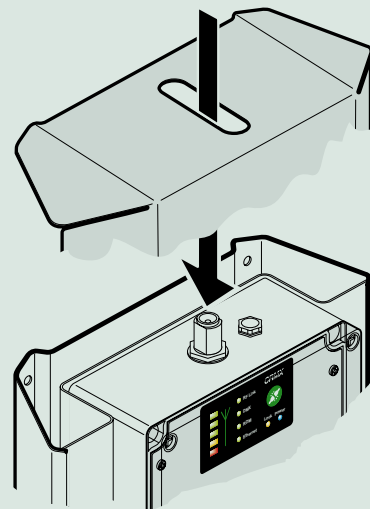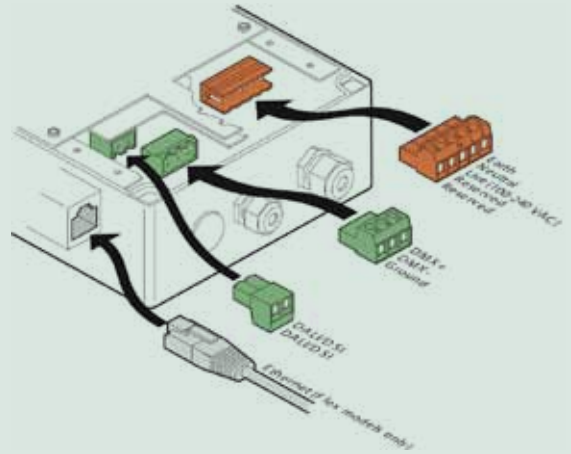

All CRMX products are covered by the United States Patent No. 7,432,803. CRMX technology is patent pending.